

ROOF 3


Roof 3 can cover areas from 120 m² to 320 m² (1,291.7 ft² to 3,444.4 ft²), depending on your needs. Roof 3 covers a max. stage size of 21 x 16.5 m (68.5 x 52 ft).

USED CONSTRUCTION SYSTEMS

Mast section	TT44
Support truss	TT74M, TT54M
Outside rafter	FT44
Inside rafter	FT43

SPECIFICATIONS

Max. dimension	25 x 20 m (82.02 x 65.62 ft)
Max. stage size	21 x 16.5 m (68.9 x 64.1 ft)
Max. clearance	11.5 m (37.7 ft)
Max. height	15.5 m (50.8 ft)
Max. load bearing capacity	12500 kg (27,558 lbs)

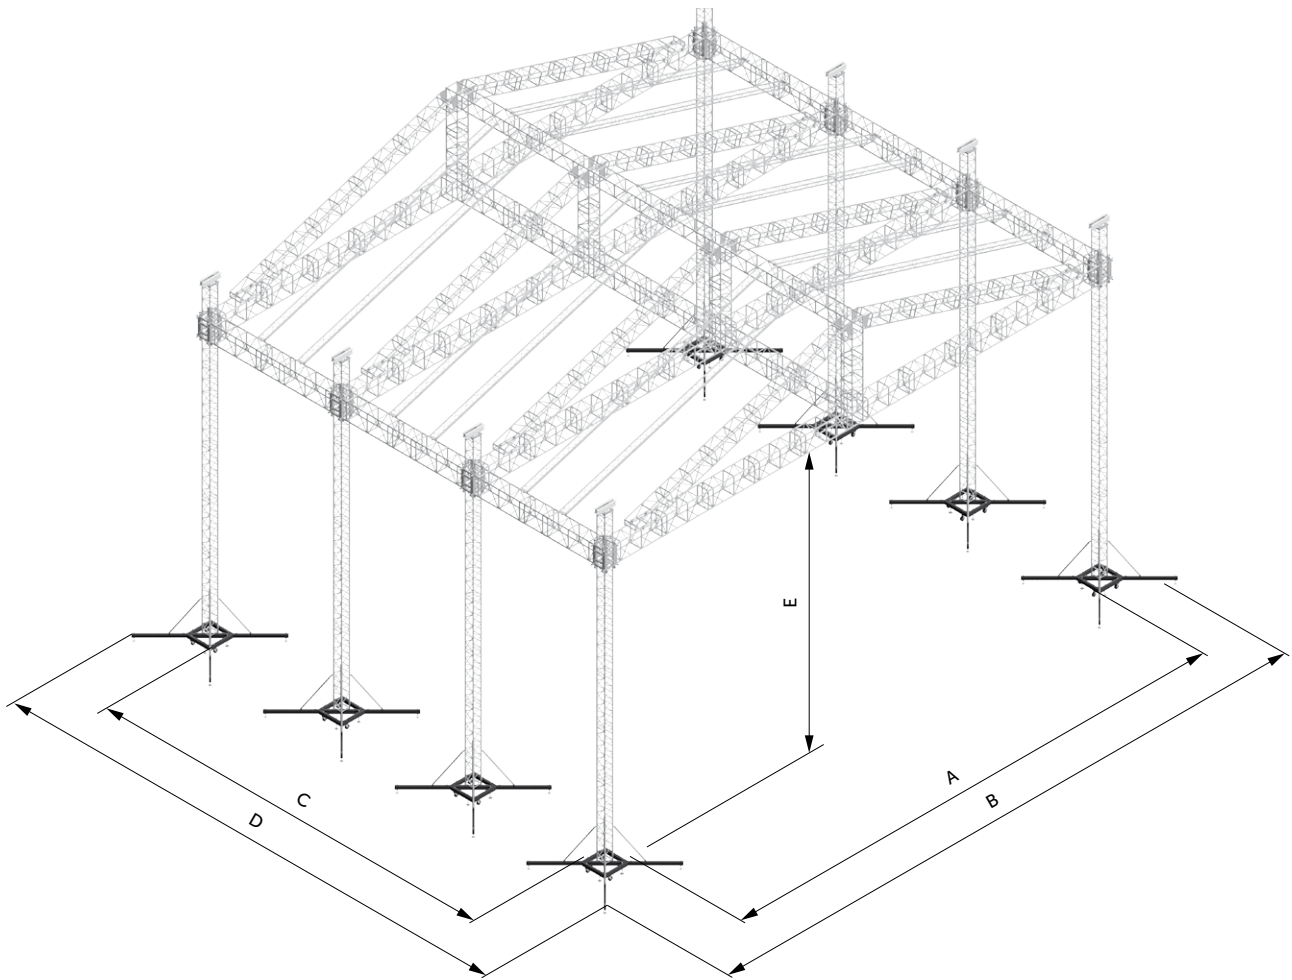

STAGE MEASUREMENTS

STAGE SIZE	Inside width	Overall width	Inside depth	Overall depth	Clearance
	A	B	C	D	E
21 x 16.5 m (68.9 x 64.1 ft)	21 m (68.9 ft)	25 m (82.02 ft)	16.7 m (54.8 ft)	20 m (65.6 ft)	11.5 m (37.7 ft)

WIND MANAGEMENT

In service max. allowed windspeed - 20 m/s - 72 km/h - 45 mph

At TAF, we pride ourselves on crafting custom roofs that seamlessly combine durability, functionality, and a bespoke design. Our expertise lies in creating roof solutions tailored to your specific needs.

Whether you require roofs with special dimensions, or unique specifications, we have the experience and knowledge to deliver exactly what you envision. No matter the scale or complexity of your project, our team ensures precision engineering and exceptional quality every step of the way.

Partner with TAF for all of your roofing needs. Your vision, our expertise. Together, we build better.